




## ALARM STROBE & HORN

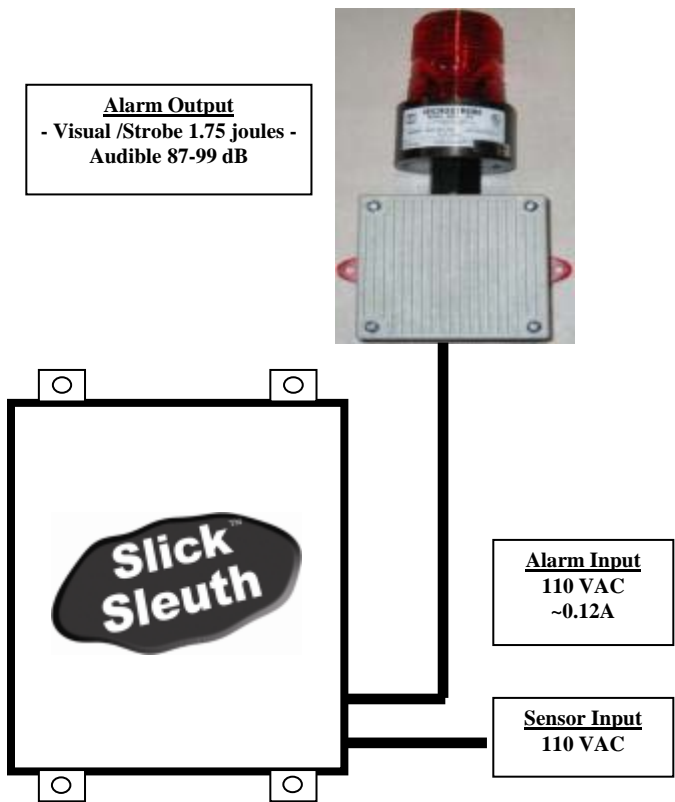

**Alarm Output**  
 - Visual /Strobe 1.75 joules -  
 Audible 87-99 dB

**Alarm Input**  
 110 VAC  
 ~0.12A

**Sensor Input**  
 110 VAC

The Alarm Strobe & Horn Option is for installation in local proximity to the Slick Sleuth Oil Spill Detection & Alarm Systems. The option provides audio and visual spill alarm notification to nearby personnel.

The horn produces 1 of 8 selectable tones with dB-level range of 87 to 99dB, depending on selected tone. Strobe has a uniform 360-degree light pattern, with 60-80 flashes per minute.

The strobe light and horn are mounted to a heavy-duty cast box for either flat surface mount or 1/2" NPT pipe mounting.

Lens, base and cast box are impact resistant polycarbonate.

UL listed.

Multitone Horn dBA Ratings			
dBA Reverberant at 10 Feet			
Per UL464			
	Tone	High	Standard
1	Horn	88	82
2	Bell	82	75
3	March Time Horn	85	79
4	Code-3 Horn	85	75
5	Code-3 Tone	79	75
6	Slow Whoop	88	82
7	Siren	85	82
8	Hi/Lo	82	79